



Industrial sensors

Leak Detection Sensor

TX CONTACT 600-039 + LEAK CABLE



Technical Specifications

Physical Characteristics	
Protection rating	IP65
Mounting	Wall-mounted
Operating temperature	- 20 / + 55°C
Power supply	3.6V Lithium D-type battery - Replaceable battery
Battery life	12 years for a transmission every 5 minutes (SF9)


Radio	
Supported protocols	LoRaWAN (Class A) and Enless proprietary LoRa
Frequency	868MHz
Addressing	LoRaWAN = DEVEUI, APPEUI, APPKEY (OTAA) Enless proprietary LoRa = Enless LoRa ID
Encryption	LoRaWAN = AES128 Enless proprietary LoRa = No encryption
Transmission power	25mW (14 dBm)


Interface	
On-Off	
Probe type	Liquid presence detection cable
Cable length	2 meters
Messages	Instantly on state change in the presence of water Periodic sending

Certifications



Dimensions (mm)

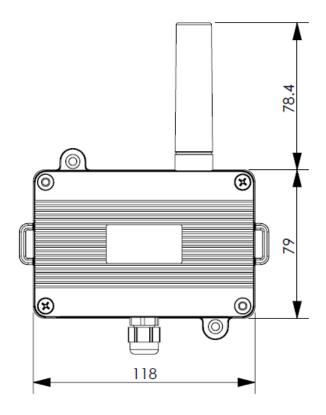

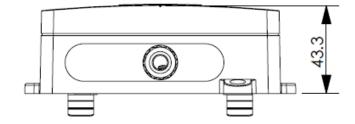

Enless Wireless 6 Bis Rue du Temple, 33000 Bordeaux, France www.enless-wireless.com 33 (0)5 56 35 97 47 contact@enless.fr

